

**INSPIRE – EMPOWER – INNOVATE**

**SKI LIFT MECHANIC PERSONAL PROTECTIVE EQUIPMENT- PREMIUM PACKAGE:  
THE HIGHEST QUALITY, EXTRA COMFORT, LIGHTEST WEIGHT EQUIPMENT AVAILABLE**

**Item 1: NAVAHO® BOD FAST**

Work positioning and fall arrest harness with FAST buckles on leg loops

- Excellent balance between comfort when hanging and freedom of movement.
- Sternal and dorsal attachment points can be used to connect a fall-arrest system and help ensure that the user is suspended in the correct position after a fall.
- One ventral and two lateral attachment points for multiple hands-free work positioning configurations.
- FAST buckles open and close easily and quickly: the harness can be donned without having to readjust all the buckles.
- Foam padded shoulder straps.
- Dorsal attachment point adjustment.
- Improved waist belt support.
- Rear buckle with attachment point.

**Certification**

CE EN361, EN358, EN813

**Technical specifications**

| Ref.     | Waist belt | Leg loops | Height     | Weight |
|----------|------------|-----------|------------|--------|
| C710F0 1 | 70-120 cm  | 50-65 cm  | 160-180 cm | 1890 g |
| C710F0 2 | 80-140 cm  | 60-75 cm  | 175-200 cm | 2000 g |



**Item 7: ANNEAU C40 (120cm)**

Stitched polyamide webbing sling

Intended for rapid installation of temporary anchor points.


- Resistant to abrasion and aging.
- Available in four color-coded lengths.

**Certification**

CE EN 566 & EN 795 B

**Technical specifications**

Breaking load: 22 kN

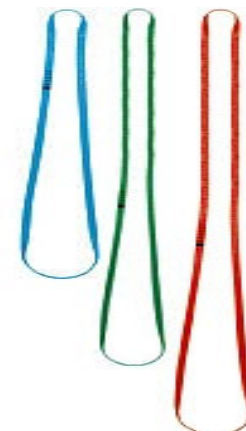

**INSPIRE – EMPOWER – INNOVATE**

**ITEM 3: ABSORBICA-Y 150 MGO**

Energy absorber with integrated Y-shaped lanyard and two MGO connectors

- The 2 arms allow the user to remain connected to the safety system when passing intermediate anchor points.
- 150 cm length increasing mobility in the work zone, and makes it easier to work on structures with wide trusses (pylons, for example).
- The lanyard is very flexible and doesn't interfere with the worker when slack.
- The zippered pouch protects the energy absorber from abrasion, etc. The energy absorber is easy to inspect.
- The STRING for the harness end of the lanyard holds the connector in position and protects the webbing from abrasion.
- The plastic sleeve on the sewn termination holds the connector in position and protects the rope from abrasion.
- Very large, automatically locking MGO connector. Its captive eye design helps prevent dropping or cross-loading the connector.



**Certification**

CE

**Technical specifications**

Length: 150 cm not including connectors.